

訂購品號 ORDER CODE :
SV860A-MF-UT57




控制箱規格表 CONTROL BOX SPECIFICATION			
機能	FUNCTION	SV-860A	SV-860E
1. 輸入電壓	1. Input Power Voltage	1Φ: AC 200-240V	
2. LED電源輸出 (DC12V)	2. External LED Power Output (DC12V)		✓
3. 上/下停針控制	3. Needle Up / Down		✓
4. 最高速設定	4. Max. Speed Setting		✓
5. 慢速啟動	5. Soft Start		✓
6. 切線後反轉	6. Reverse After Thread Trimming		✓
7. 一發著針功能 (快速定位)	7. One Shot Positioning (Fast Positioning)		✓
8. 診斷模式 (檢查輸出/輸入狀態)	8. Diagnostic Mode (Inspect I/O Condition)		✓
9. 故障錯誤記錄 (前6次)	9. ERROR History Mode (Record Previous 6 Times)		✓
10. 連結立式踏板 (PK-71、PK-81)	10. Connect Standing Operation Pedals (PK-71, PK-81)		✓
11. 連結選針盒 (C18)	11. Connect External Operation Panel (C18)		✓
12. 連結電子手輪	12. Connect Manual Pulse Generator		✓
13. 內建穿透式光感應器電路	13. Built-in Transmissive Optical Sensor Circuit	✓	
14. 輸入接點數 (可依需求設定)	14. Input Ports No. (Adjustable according to Requirements)	5	5
15. 輸出接點數 (可依需求設定)	15. Output Ports No. (Adjustable according to Requirements)	5	4
1) 氣動用・DC24V/100mA	1) For Cylinder, DC24V / 100mA	5	3
2) 電磁用・DC24V/9A/100ms	2) For Solenoid, DC24V 9A / 100ms	0	1

馬達規格 MOTOR SPECIFICATION

直驅馬達 Direct Drive Motor

SM7-6560-JK4

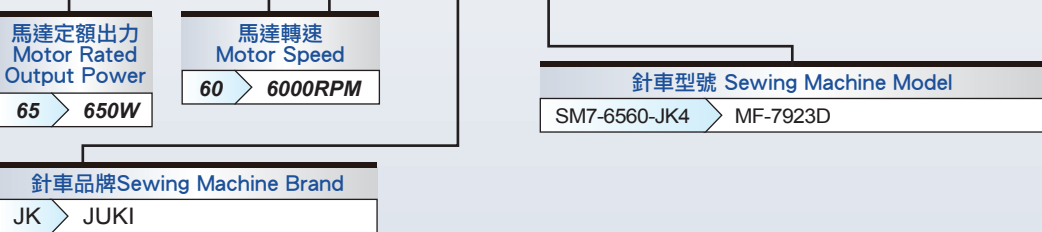

採用直驅伺服器馬達，起縫快速，定位精準，低噪音，無皮帶屑污染

Direct drive servo motor system provides quick start sewing, precise positioning, low noise, and no belt dust.

產品特色 FEATURE	
1. 輕鬆取代傳統離合器馬達	1. Simple to upgrade from clutch motor
2. 高效能，低耗電	2. High efficiency, low power consumption
3. 簡易操作	3. Easy operation
4. 體積小，輕重量	4. Compact size, light weight.
5. 馬達過電流保護機能及電源高低壓隔離，操作上更安全	5. Over current protection and high/low voltage isolation for safer operation.
6. 二位元數位面板，提供更多項參數設定功能	6. 2-digit display provides flexible setting function.
7. 可選配同步器進行定針模式操作	7. Optional synchronizer for needle positioning mode.



高品質製品 High Quality

工業用縫紉機 伺服馬達

Servo Motor for Industrial Sewing Machine

Compatible with Direct Drive Motor

SV860A-MF-UT57 MOTOR FOR JUKI MF-7923D





SV860A-MF-UT57 FOR JUKI MF-7923D



SV860A-MF-UT57 FOR JUKI MF-7923D




＊ ＊ SIMPLY REPLACING THE ORIGINAL CONTROL BOX AND MOTOR ＊ ＊

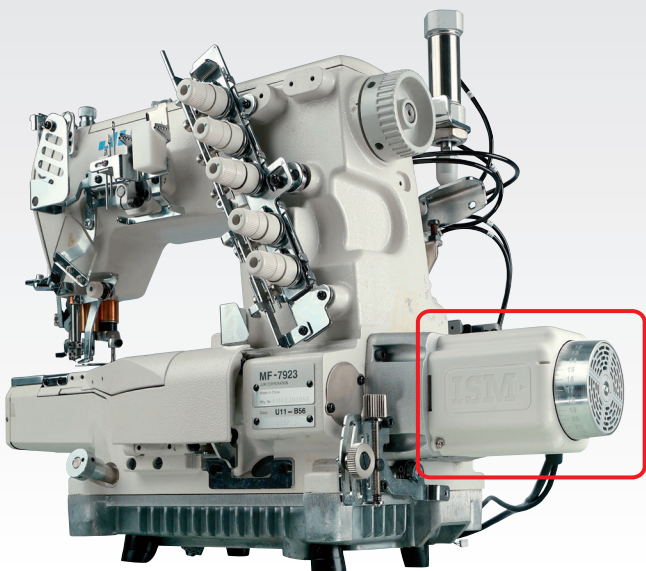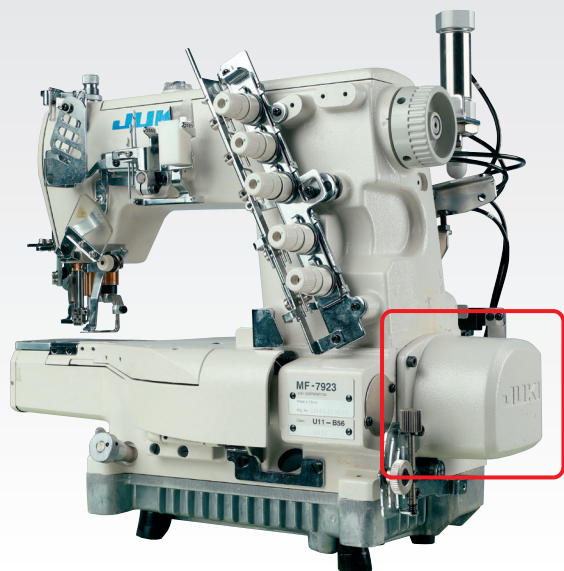

JUKI 原廠馬達
JUKI ORIGINAL MOTOR

ISM 馬達
ISM D. D. MOTOR

＊ ＊ WITHOUT REMOVING ANY PART FROM SEWING MACHINE ＊ ＊

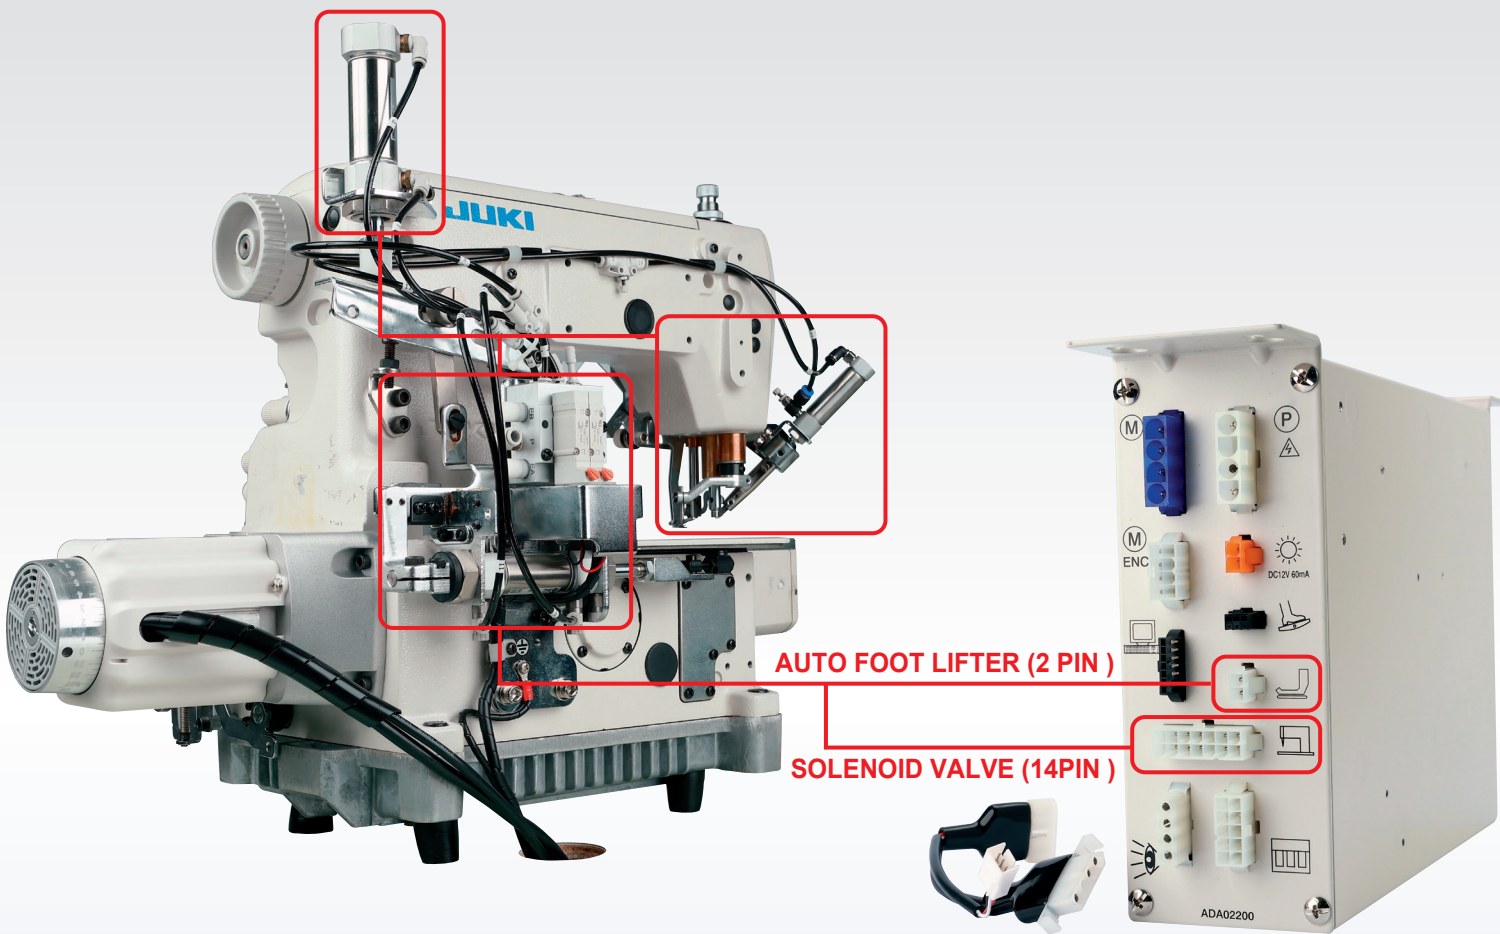

標配 STANDARD

SV-860A CONTROL BOX

SM7-6560-JK4B D.D MOTOR
650W, 6000RPM

SPEED UNIT



ADAPTOR CABLE

產品特色 FEATURE

- ＊ POSSIBLE TO EQUIPPED WITH JUKI UT57 THREAD TRIMMER DEVICE
- ＊ 可搭配 JUKI 原廠刀組 UT57
- ＊ 14-PIN CONNECTOR FOR CONNECTING TO JUKI ORIGINAL SOLENOID VALVES
- ＊ 14PIN 合 JUKI 原廠電磁閥
- ＊ 2-PIN CONNECTOR FOR CONNECTING TO JUKI ORIGINAL FOOT LIFTER SOLENOID VALVE
- ＊ 2-PIN 接頭配接 JUKI 原廠自動抬壓腳電磁閥